


# CK 3




A small hypercardioid capsule for optimum results in multitrack recordings and for stage use with increased gain before feedback.



## Technical Data:


- Frequency range: 20 to 20,000 Hz  $\pm 1$  dB from published curve.
- Sensitivity at 1,000 Hz: 9.5 mV/Pa  $\Delta$  0.95 mV/ $\mu$ b  $\Delta$  -60.5 dBV ref. 1  $\mu$ b.
- Dimensions: 18  $\varnothing$  x 28 mm (0.7  $\varnothing$  x 1.1 in).
- Weight: 20 g (0.7 oz) net, 60 g (2.1 oz) shipping.

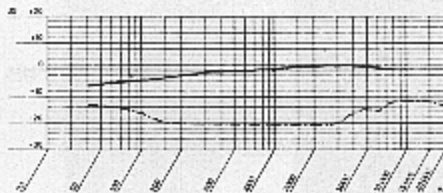

# CK 3 X




Same as CK 1 X, but with hyper-cardioid polar response for better separation when used for multitrack recordings.

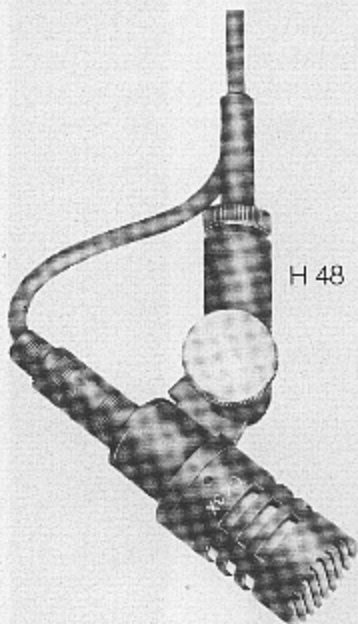

H 48

MK 46/3

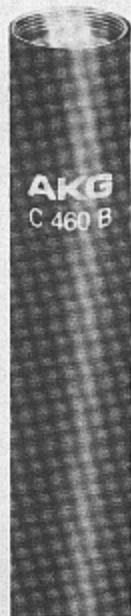

## Technical Data:

(measured in connection with the C 460 B pre-amplifier)

- Frequency range: 20 to 16,000 Hz
- Sensitivity at 1,000 Hz: 11 mV/Pa  $\pm$  1.1 mV/ $\mu$ b  $\pm$  - 59 dBV ref. 1  $\mu$ b
- Equivalent noise level: acc. to DIN 45405 (CCIR 468-2): 23 dB acc. to DIN 45412 (A-weighted): 16 dB-A
- S/N ratio ref. 1 Pa (A-weighted): 78 dB
- Max. sound pressure: 200 Pa  $\pm$  140 dB SPL
- Operating temperature range: -10° C to +60° C
- Permissible humidity level: 99% (+20° C), 95% (+60° C)
- Dimensions: 18  $\varnothing$  x 40 mm (0.7  $\varnothing$  x 1.6 inch)
- Weight: approx. 30 g (1.1 oz) net.
- Shipping weight: 150 g (5.3 oz)
- Connector: 3 pin LEMOSA, size 0.