

RS-702 Two-Channel Beltpack

Analog Partyline Intercom Systems

Linking
People
Together



RS-702

Key Features

- Two-channel analog beltpack
- XLR-6 line connectors for 2-Channel + Program Audio
- Visual LED indication on top of keypad for Power (green), Call Signal (amber), and Talk Latch (green)
- Tactile buttons for Call and Talk
- Recessed rotary control for Volume with end stops for 270° rotation range
- Concealed, programmable DIP Switches for Latch Talk on Channels A/B, Talk with Call, LEDs Off, Mic Gain, Mic Type, HP Level Off, Min Volume and Call-on Talk
- Program Audio thumbwheel adjustment
- Fully compatible with current and previous models of Clear-Com analog partyline systems
- Low operating current for more beltpack daisy-chaining
- Rugged and strong construction
- “Clear-Com Sound” for intelligible audio

Encore™ is a 2-wire analog partyline system with intuitive plug-and-play design and superior “Clear-Com Sound” audio clarity.

Description

The RS-702 is a two-channel analog beltpack that can carry power and audio through the XLR-6 line connector. Each beltpack combines high headroom, low-noise audio and shaped frequency contour (the “Clear-Com Sound”) to deliver clear audio.

Operation

The RS-702 features LEDs on the top of the beltpack for visual indication of incoming and outgoing call signaling. A mic preamp enables intelligible voice communication for every volume level. Recessed rotary volume control, Talk and Call keys guard against accidental activation. The RS-702 has low operating current to allow for more beltpacks in a daisy-chain. Additionally, a thumbwheel level adjustment is available for Program In.

DIP Switches and LEDs

A concealed DIP switch panel on the back of the beltpack allows the capability to select audio and key options quickly and easily. DIP switches can control features such as switching between electret or dynamic headsets, setting a minimum or off level for headphone output, adjusting volume settings, enabling or disabling LED signals, having Call on Talk or latching the Talk key for Channel A, having Call on Talk or latching the Talk key for Channel B, Channel B Minimum Volume setting, and RTS/ Clear-Com Select. A green LED indicates that the beltpack is powered and a green LED on the Talk key indicates that the microphone is active (Talk is latched). An amber LED indicates a Call signal on the channel.

Improved Design

The RS-702 is designed in a rugged and reliable casing with a retro-design connection to the previous RS-500 Series beltpacks. A belt clip allows a variety of ways to use the beltpack; users can clip it to a belt or lanyard, or users can mount the belt clip to a wall, pole or desk for fixed installations.

Compatibility

The RS-702 is compatible with all Encore partyline products, as well as the PL-Pro line and other partyline systems via Encore interfaces.

RS-702 Two-Channel Beltpack

Analog Partyline Intercom Systems

Technical Specifications

dBu is an absolute measurement.
0 dBu is referenced to 0.775 volts RMS

Microphone Pre-Amplifier

Mic to Line (without limiter acting)

Frequency Response:
280 - 15k Hz \pm 3dB
Microphone output to line -
Audio Level (-50dBm Electret input): -9dBm
Microphone output to line -
Distortion: <0.1%
Microphone output to line -
Signal to Noise: >65dB
Clear-Com Sound: Yes

Headphone Amplifier

Frequency Response - Line to Headphone:
150 - 20k Hz \pm 3dB
Headphone input from line -
Audio Level (-9dBm Electret input): 7dBm
Headphone input from line -
Distortion: <0.5%
Headphone input from line -
Signal to Noise: >50dB
Earphone to Mic - Crosstalk:
>80dB
Sidetone - Adjustment Range (-80db mic input): >45dB

Keypad Indicators

Power: Green LED
Talk A and B: Green LED
Call A and B: Orange LED

Connectors

Intercom Line: (2) 6-pin XLR-M-F
Ch. 1 2-Wire

Intercom Channel

Pin 1: Common
Pin 2: PL Power (+28VDC)
Pin 3: PL Ch-B
Pin 4: PL Ch-A
Pin 5: Program Audio
Pin 6: Program Audio

Headset: 4-pin XLR-M

Headset Connector

Pin 1: Mic - (Mic Common)
Pin 2: Mic +
Pin 3: Spkr-
Pin 4: Spkr+ (and 0.5*VCC DC, supply between Pin 4 and Pin 1)
Program Audio Input: XLR-6, Pin 5 and Pin 6

Power

Input Voltage Range: 12-30 VDC
Input Current (Idle): <=25mA
Input Current (Max): <=40mA

Call Voltage

16.5 VDC
Minimum Voltage Needed: 3.3V

Environmental

32°F - 158°F (0°C - 70°C)
Relative Humidity:
0 - 90%, non-condensing


Dimensions

3.4 x 4.5 x 1.7 in (HxWxD)
(86 x 114 x 43 mm)

Weight

10.5 oz (0.30 kg)


RS-702 DIP Switches

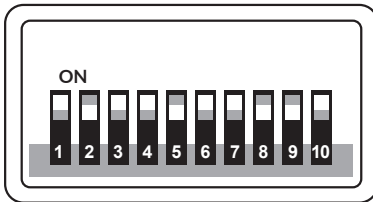


RS-702 Dip Switches

- | | | |
|--|---|---|
| 1. Mic Type
ON = Dynamic (default)
OFF = Electret | 4. LEDs On/Off
ON = LEDs normal operation (default)
OFF = All LEDs dark | 7. Min Volume - Channel B
ON = Silent at min level (default)
OFF = Not silent at min level |
| 2. Headset Output Level
ON = High
OFF = Low (default) | 5. Call-on Talk Enable - Channel A
ON = Call occurs when talk on
OFF = No call when talk on (default) | 8. Not Used in RS-702 |
| 3. Min Volume - Channel A
ON = Mute at min level (default)
OFF = Not silent at min level | 6. Talk Latch Enable - Channel A
ON = Latch enabled (default)
OFF = Latch disabled | 9. Call-on Talk Enable - Channel B
ON = Call occurs when talk on
OFF = No call when talk on (default) |
| | | 10. Talk Latch Enable - Channel B
ON = Latch enabled (default)
OFF = latch disabled |

RS-702 Top

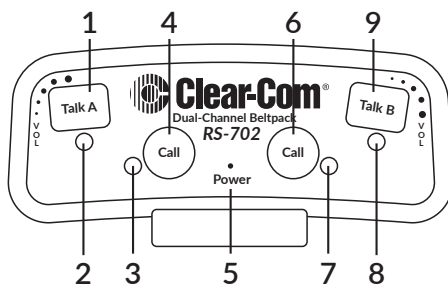

RS-702 Bottom

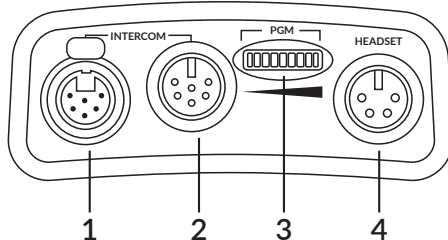

Legend

Top

- Ch A Talk Key
- Ch A Talk Key LED
- Ch A Call Key LED
- Ch A Call Key
- Power LED
- Ch B Call Key
- Ch B Call Key LED
- Ch B Talk Key LED
- Ch B Talk Key

Bottom

- Intercom Line In
- Intercom Line Out
- Program In Thumbwheel
- Headset Connector

Order Code

RS-702