

Blackmagic Web Presenter





Blackmagic Web Presenter makes any SDI or HDMI video source appear as a USB webcam for higher quality web streaming using software such as Skype or streaming platforms such as YouTube Live, Facebook Live, Twitch.tv, Periscope and more! Blackmagic Web Presenter includes 12G-SDI and HDMI inputs, XLR microphone input, HiFi audio input, Teranex quality down conversion and a 2 input live switcher when used with the optional Teranex Mini Smart Panel.

\$495

Connections

SDI Video Input 1	Analog Audio Inputs 1x XLR mic and line, 2x HiFi analog.	HDMI 2.0 1 X Input, 1 X loop out, (2 channel embedded audio)
SDI Video Output 1x program out, 1x loop out.	Total Audio Outputs None, embedded audio only.	RCA 2 X HiFi Analog audio input
SDI Rates 1.5G, 3G, 6G, 12G	USB Webcam 1	XLR 1 X input supporting both microphone and line levels
HDMI Video Input 1	12G-SDI 1 X BNC input, 1 X BNC Loop out, 1 X BNC monitor, (2 channel embedded audio)	USB 2.0 1 X Type B
HDMI Video Output 1x loop out		Mini USB 1 X for software updates

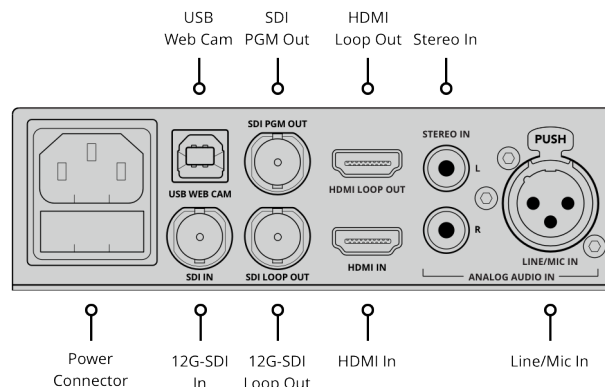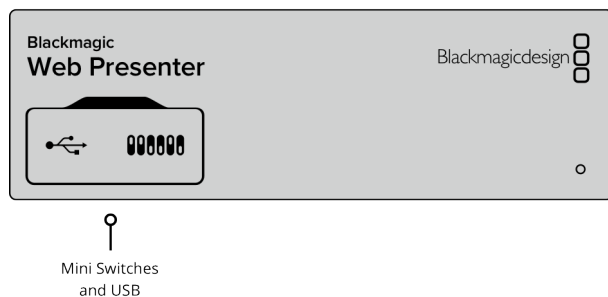

HDMI Format Support

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60,
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60,
1080i50, 1080i59.94, 1080i60

UHD Video Standards

2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

12G SDI Format Support

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60,
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60,
1080PsF 23.98, 1080PsF 24, 1080PsF
25, 1080PsF 29.97, 1080PsF 30,
1080i50, 1080i59.94, 1080i60

UHD Video Standards

2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

Control

Basic Settings Control

Mini Switches.

Optional Front Panel Control

Six settings buttons including 2 input
switcher.

Software

Compatible Services and Software

YouTube Live, Facebook Live,
Twitch.tv, Periscope, Skype, Open
Broadcaster and XSplit Broadcaster.

Operating Systems



Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan or later.



Windows 8.1 64-bit or Windows 10
64-bit.



Linux

Settings Control

Basic Settings Control

Mini Switches

Optional Front Panel Control

Front mounted Smart Panel with LCD,
rotary knob and six settings buttons.

Power Requirements

Power Supply

1 x built-in international AC power
supply with IEC C14 inlet. IEC Power
cable required. 90 - 240V AC Input.


Power Consumption

24 watts

Operational Voltage Range

90 - 240V AC

Physical Specifications

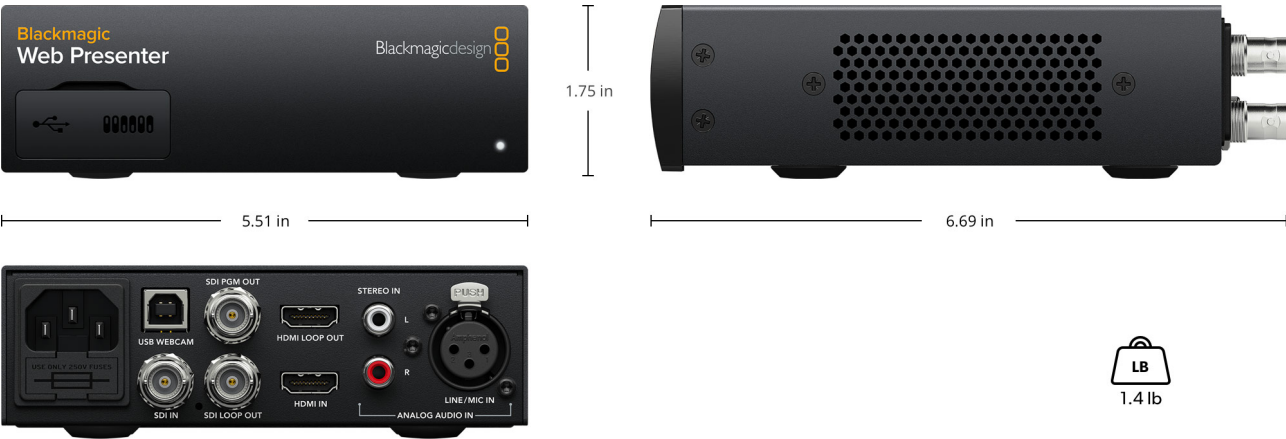

Environmental Specifications

Operating Temperature: 5° C to 50° C (41° - 122°F)	Storage Temperature: -20° to 60° C (-4° to 140° F)	Relative Humidity: 0% to 90% non-condensing
--	--	---

What's Included

Web Presenter	SD card with software and manual
---------------	----------------------------------

Warranty

3 year Limited Manufacturer's
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2017, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller