



24" Multi-Format LCD Monitor DT-R24L41D

17" Multi-Format LCD Monitor DT-R17L4D


Convenient features and user-friendly design promise outstanding versatility, making these multi-format LCD monitors ideal for diverse professional applications.



HIGHLIGHTS

Wide viewing angles

The R Series monitors provide faithful color reproduction and wider viewing angles of up to 178 degrees from the top/bottom and the sides.



Faithful color reproduction

Matrix parameters are set in response to the actual HD or SD input signal, making it possible to accurately reproduce colors in strict conformity with ITU standards without having to process color signals. And a chromatic range equivalent to EBU 100% ensures faithful color reproduction that is virtually identical to the original source.

Gamma calibration

Accurate image display is absolutely necessary for professional video production and JVC is able to ensure extremely precise grey-scale characteristics by calibrating the gamma of each monitor at the factory before it is shipped.

Durable design means extra reliability


The R Series features robust design in order to fully answer the demanding requirements of daily usage in a studio or academic environment. What's more, the monitor's rigid construction makes it highly suitable for wall mounting.

Dual time code display

The R Series supports both LTC (longitudinal time code) and VITC (vertical interval time code), which can be switched from one to the other.


Advanced audio level meter

A convenient audio level meter with multiple indications such as peak hold showing peak audio levels, channel numbers for each channel bar, and graduation levels displaying the three set levels of reference, over, and OdB, provides at-a-glance recognition of audio signal status.



3-way stand ensures versatile installation anywhere

R Series monitors can be easily installed anywhere at the most desired locations thanks to the supplied 3-way stand. In addition to use of the stand in a conventional tabletop configuration, the monitor can also be mounted flush up front to make the stand less conspicuous, or even mounted on a wall using the VESA-standard 100mm x 100mm pitch screw holes.





Compatible Signals

—: Compatible —: Incompatible

No.	Signal Name	Signal Format Shown in the Status Display	Input Terminal		
			VIDEO (IN1, IN2)	E.AUDIO HD/SD SDI (IN1, IN2)*1	DVI-D (HDCP) (Digital Component/Digital RGB)
1	NTSC	NTSC	✓	—	—
2	PAL	PAL	✓	—	—
3	B/W50	B/W50	✓	—	—
4	B/W60	B/W60	✓	—	—
5	480/60i or 480/59.94i	480/60i or 480/59.94i	—	✓	—
6	576/50i	576/50i	—	✓	—
7	480/60p or 480/59.94p	480/60p or 480/59.94p	—	—	✓
8	576/50p	576/50p	—	—	✓
9	640*480/60p or 640*480/59.94p	640*480/60p or 640*480/59.94p	—	—	✓
10	720/60p or 720/59.94p	720/60p or 720/59.94p	—	✓	✓
11	720/50p	720/50p	—	✓	✓
12	720/30p or 720/29.97p	720/30p or 720/29.97p	—	✓	—
13	720/25p	720/25p	—	✓	—
14	720/24p or 720/23.98p	720/24p or 720/23.98p	—	✓	—
15	1080/60i or 1080/59.94i	1080/60i or 1080/59.94i	—	✓	✓
16	1035/60i or 1035/59.94i	1035/60i or 1035/59.94i	—	✓	✓ ^{2,3}
17	1080/50i	1080/50i	—	✓	—
18	1080/60p or 1080/59.94p	1080/60p or 1080/59.94p	—	—	✓
19	1080/50p	1080/50p	—	—	✓
20	1080/30p or 1080/29.97p	1080/30p or 1080/29.97p	—	✓	✓
21	1080/25p	1080/25p	—	✓	—
22	1080/24p or 1080/23.98p	1080/24p or 1080/23.98p	—	✓	✓
23	1080/30psf or 1080/29.97psf	1080/30psf or 1080/29.97psf	—	✓ ^{2,3}	—
24	1080/24psf or 1080/23.98psf	1080/24psf or 1080/23.98psf	—	✓	—

*1 Compatible with EMBEDDED AUDIO signals. *2 Signal is recognized as 1080/60i, and its status is displayed as "1080/60i." *3 Signal is recognized as 1080/59.94i, and its status is displayed as "1080/59.94i."

Computer Signals (preset): DVI-D (HDCP) Terminals

No.	Signal Name	Resolution		Frequency		Scan System
		Horizontal	Vertical	Horizontal (kHz)	Vertical (Hz)	
1	VGA60	640	480	31.5	59.9	Non-interface
2	WVGA60	852	480	31.5	59.9	Non-interface
3	SVGA60	800	600	37.9	60.3	Non-interface
4	XGA60	1024	768	48.4	60.0	Non-interface
5	WXGA (1280)	1280	768	47.8	60.0	Non-interface
6	WXGA+60 ^{1,4}	1440	900	55.9	60.0	Non-interface
7	SXGA60 ^{1,4}	1280	1024	64.0	60.0	Non-interface
8	WSXGA+60 ^{1,4}	1680	1050	65.2	60.0	Non-interface
9	UXGA60 ^{1,4}	1600	1200	75.0	60.0	Non-interface
10	WUXGA60 ^{1,4}	1920	1200	74.0	60.0	Non-interface
11	720/60p	1280	720	45.0	60.0	Non-interface
12	1080/60p ^{1,4}	1920	1080	67.5	60.0	Non-interface
13	720/50p	1280	720	37.5	50.0	Non-interface
14	1080/50p ^{1,4}	1920	1080	56.25	50.0	Non-interface

^{1,4} For the DT-R17L4D: When the 6 to 10, 12 or 14 numbered signals are received, thin lines will become obscure as signal resolution is higher than screen resolution.

Front Control

DT-R24L41D



DT-R17L4D



Option: Rack Mount Adapter RK-C17D2

Rear Terminal


DT-R24L41D



DT-R17L4D



Dimensions (Unit: mm)

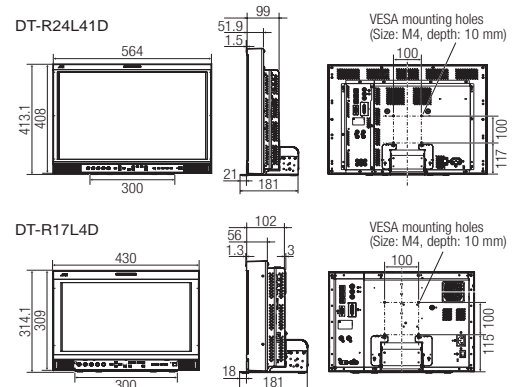

Other features

- Picture: • Frame latency of less than 1 frame • CTI and LTI functions • 10-bit image processor • ITU 709 and Adobe color space modes are selectable (for the DT-R24L41D)
- External controls: • RS-232C, RS-485 and make/trigger terminals • LED indicators with dimmer function • Source ID input by ASCII code • Power save mode • Make/trigger terminal functions: 1:1 mode, area markers compatible with different aspect ratios, safety markers, 16:9/4:3 aspect ratio switching, screen check, auto aspect selection, and two-color (green/red) tally lamps

Specifications

Model	DT-R24L41D	DT-R17L4D
Type	Multi-format LCD Monitor	
Aspect Ratio	16:10	16:9
LCD Panel	24" wide, active matrix TFT	17" wide, active matrix TFT
Effective Screen Size	518.4 x 324 mm (20-1/2" x 12-7/8")	327.9 x 209.7 mm (14-11/16" x 8-1/4")
Panel Resolution	1920 x 1200 (W-LXGA)	1366 x 768 (W-XGA)
Panel Response Time (G to G)	5 ms (typical)	Rise time: 8ms / Decay time: 8ms (typical)
Display Colors	16.77 million	
Horizontal / Vertical Frequency (Computer Signal)	H: 31.469 kHz – 75.000 kHz / V: 48 Hz – 65 Hz (certain signals within the frequency ranges may not be displayed and "Out of Range" will be shown).	
Viewing Angle	Horizontal	178°
	Vertical	178°
Brightness	400cd	350cd
Contrast Ratio	1000:1	900:1
Applicable Standards	HD SDI: BTA S-004C, SMPTE 292M	
	SD SDI: ITU-R BT.656: 525/625, SMPTE 259M: 525	
	EMBEDDED AUDIO: SMPTE 299M, SMPTE 272M	
Audio Output	Internal: 1.0 W + 1.0 W (L/R)	
Operating Temperature / Humidity	5°C – 35°C (41°F – 95°F) / 20% – 80% (non-condensing) (varies slightly depending on ambient installation conditions)	
Storage Temperature / Humidity	-20°C – 40°C (-4°F – 104°F) / 10% – 90% / 41°C – 60°C (105°F – 140°F) / at 40% (depending on the panel storage conditions)	
Power Requirements	AC 120/220-240 V, 50/60 Hz	
Rated Current	1.15 A (AC 120 V)	1.2 A (AC 120 V)
	0.67 A (AC 220 – 240 V)	0.8 A (AC 220 – 240 V)
Dimensions (W x H x D) Excluding Protrusions	Without Desktop Stand	430 x 309 x 102 mm (17" x 12-1/4" x 4-1/8")
	With Desktop Stand	564 x 413.1 x 181 mm (22-1/4" x 16-3/8" x 7-1/4")
Weight	Without Desktop Stand	6.5 kg (14.3 lbs)
	With Desktop Stand	10.1 kg (22.2 lbs)
Provided Accessories	AC power cord, power cord holder x 1, Screws x 2 (for power cord holder)	

Input/Output Terminals

Model	DT-R24L41D	DT-R17L4D
Video	HD/SD SDI (IN1/IN2)	BNC x 1/BNC x 1
	HD/SD SDI (OUT)	BNC x 1
	Video 1	BNC x 2 (IN/OUT)
	Video 2	BNC x 2 (IN/OUT)
DVI-D (HDCP)	DVI-D connector x 1	
Audio	Audio IN1	RCA x 2 (audio assign)
	Audio IN2	RCA x 2 (audio assign)
	Audio Monitor Out	RCA x 2 (audio assign)
External Control	Make/Trigger	RJ-45 x 1 (8-pin)
	RS-485	RJ-45 x 2 (IN/OUT) (8-pin)
	RS-232C	D-sub (9-pin) x 1

E. & O.E. Design and specifications subject to change without notice. All TV screen pictures are simulated. All brand or product names may be trademarks and/or registered trademarks of their respective owners. Any rights not expressly granted herein are reserved.



DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY

DIVISION OF JVC AMERICAS CORP.
1700 Valley Road, Wayne, N.J. 07470
TEL: (973) 317-5000, (800) 582-5825 FAX: (973) 317-5030

Website: <http://pro.jvc.com>
E-mail: proinfo@jvc.com

Printed in U.S.A.
ICN-0397a