


STAT-PRE

USER MANUAL

SCHERTLER® 

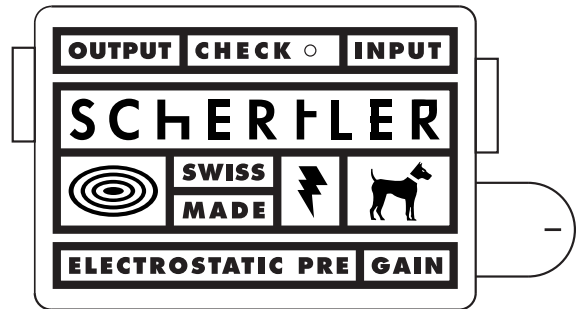

ON / OFF

The STAT-PRE is tuned ON by inserting the INPUT and the OUTPUT jack are inserted.
If only the INPUT jack is connected there is no use of the battery.

LEVEL BATTERY CHECK

To check the STAT-PRE battery level insert the mono jack into the OUTPUT. The intense blue light indicates a charged battery.

GAIN

The GAIN allows you to adjust the amplification level of the input signal.



APPLIED WITH

- STAT (electrostatic microphone)
- BLUESTICK MARINE POCKET
- PUB (active loudspeaker)
- BASIK (Acoustic transducer)

SPECIFICATIONS

| | |
|-----------------------|-----------------|
| FREQUENCY RESPONSE | 20 to 20 kHz |
| MAX OUTPUT | +8 dBu |
| MAX GAIN | 18 dB |
| MAX INPUT | 0 dBu |
| SIGNAL TO NOISE RATIO | 93 dB |
| INPUT IMPEDANCE | 25 kW |
| OUTPUT IMPEDANCE | 190 W |
| WEIGHT | 160g (0,34 lbs) |
| DIMENSIONS | 103x55x25mm |



SCHERTLER SA

Via Beroldingen 18
6850 MENDRISIO
SWITZERLAND

web-page : www.schertler.com
e-mail : sales@schertler.com

Tel. +41 (0) 91 630 07 10
Fax. +41 (0) 91 630 07 11