

WINCH 5

Item no .240

TECHNICAL DATA

MODEL: Winch 5

ITEM NO.: 240

DIMENSIONS (LxHxW): 205 × 224 × 148 mm / 8.1 × 8.8 × 5.8 in (Without mounting clamp)

POWER SUPPLY: 230 V AC 50 Hz (optional 120V/60Hz).

POWER CONSUMPTION: Max 120 Watt

POWER INLET/OUTLET: Neutrik powerCON TRUE1 NAC3PX (F/M)

DMX CONTROL SIGNAL: DMX 512 1990 + DMX512A / 7 channels used.

DMX CONNECTION: 5 pole XLR, In & link

LIFTING HEIGHT: 10 m (33 ft.)

LIFTING CAPACITY: 5 kg (11 lb)

LIFTING SPEED: Variable, 5-55 cm/s (2-22 in/s)

SNAP HOOK: 8 mm (5/16 in) galvanized steel

CAPABILITY OF OVERLOAD TEST: Yes, at 125% of maximum load.

WIRE FLEET ANGLE: None

MINIMUM LOAD: 0.4 kg (0.88 lb)

NOISE EMISSION: ~55 dB (max measured noise at 1 m/3.3 ft.)

WEIGHT: 5.2 kg (11.5 lb)

MOUNTING CLAMP: Slim eye coupler 50 mm (2 in)

MOTOR: 24 V DC, 28.9 Watt, IP30


LIFTING WIRE SPECIFICATIONS:

LIFTING WIRE: 2 mm (5/64 in) 7x7 galv. steel wire (EN 12385-4)

MINIMUM BREAKING LOAD (WIRE): 280 kg (2750 N / 618 lb)

WIRE SAFETY FACTOR: minimum 10


MAXIMUM EXPECTED WIRE LIFETIME: - At 2.5 kg (5.5 lb) load Up to 80,000 cycles running up and down.
- At 5.0 kg (11.0 lb) load Up to 20,000 cycles running up and down.

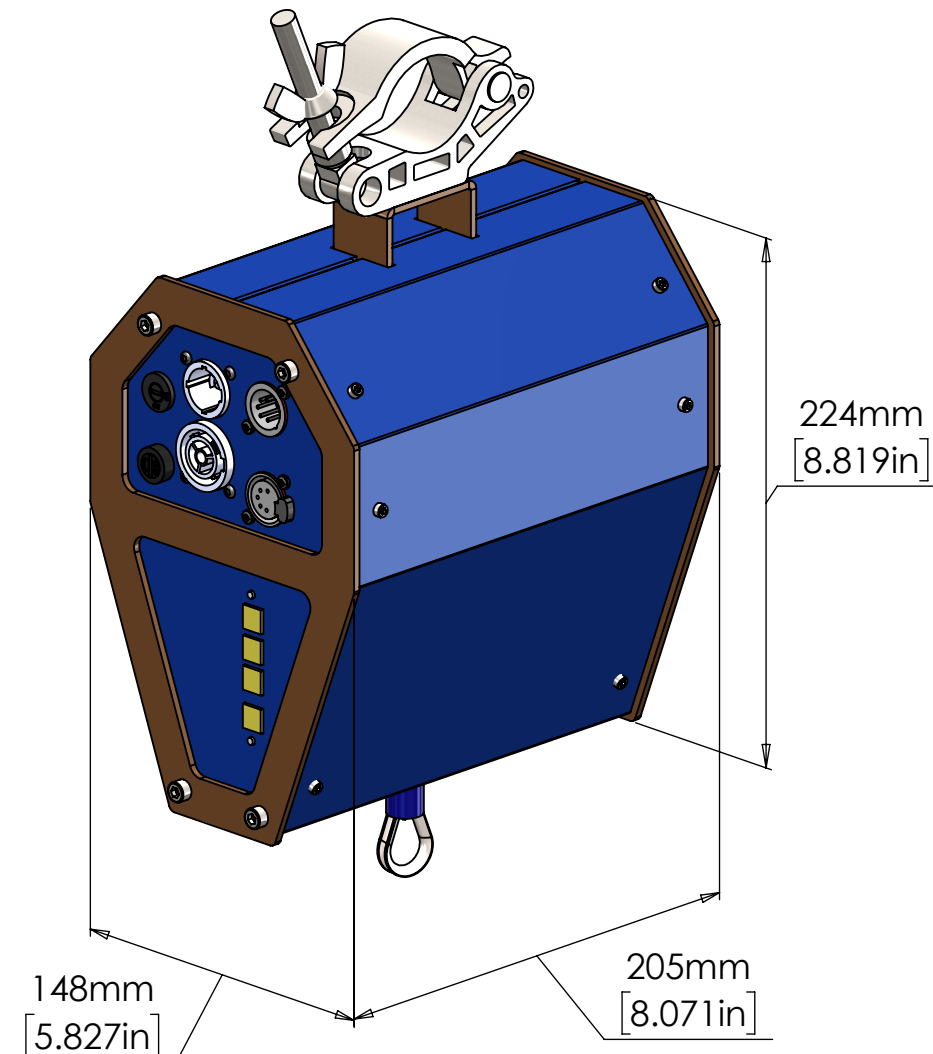


WINCH 5

Item no .240


FRONT VIEW

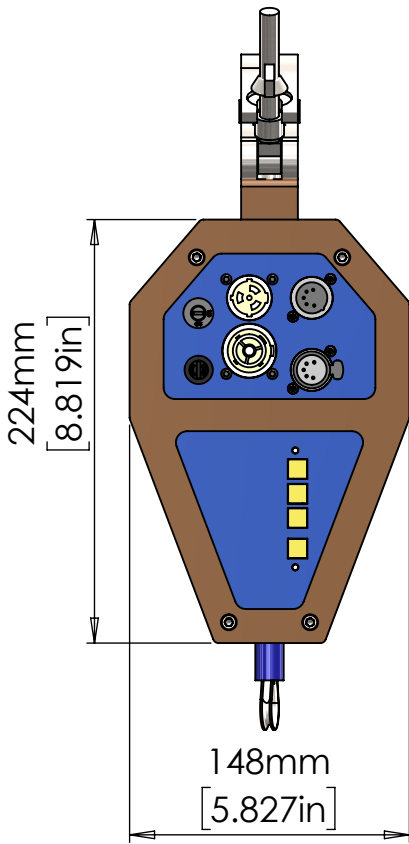

TOP VIEW

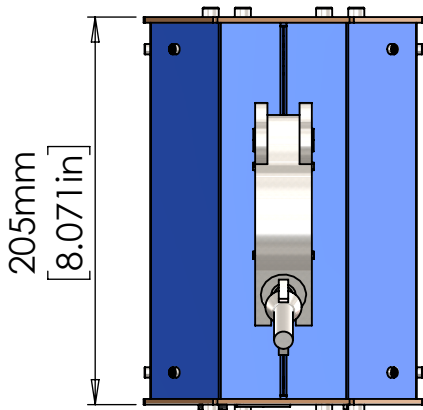

SIDE VIEW

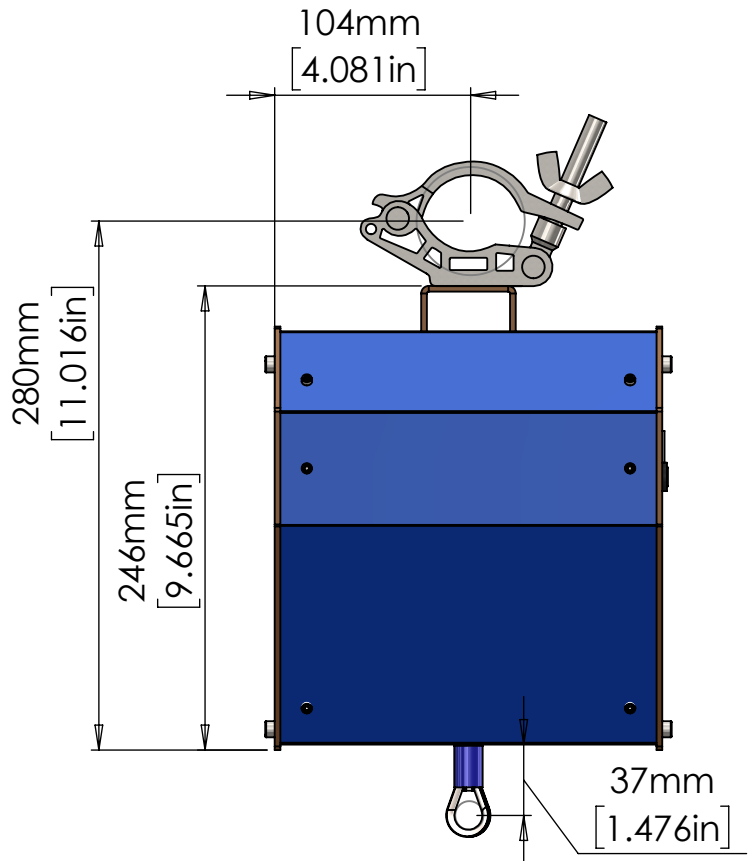

BACK VIEW

