

# Winch 25


Item no .220

## TECHNICAL DATA

MODEL: Winch 25  
ITEM NO.: 220  
DIMENSIONS (L×W×H): 287 × 229 × 355 mm (11.3 × 9.01 × 14.0 in)  
POWER SUPPLY: 200-240V AC 50-60 Hz  
POWER CONSUMPTION: 300 Watt  
POWER INLET/OUTLET: Neutrik powerCON TRUE1 NAC3MPX  
DMX CONTROL SIGNAL: DMX 512 1990 + DMX512A / 6 channels used  
DMX CONNECTION: 5 pole XLR, male & female  
LIFTING HEIGHT: 10 m (33 ft.)  
LIFTING CAPACITY: 25 kg (55 lb)  
LIFTING SPEED: Variable, 0.05-0.40 m/s (2.0-15.7 in/s)  
MINIMUM LOAD: 1.0 kg (2.2 lb)  
NOISE EMISSION (AT 1 m): -50 dB  
AMBIENT TEMPERATURE: 0-40° C (32-104° F)  
OWN WEIGHT: 21 kg (46.5 lb)  
MOUNTING CLAMP: 2× Slim eye coupler 50 mm (2 in)  
MOTOR: 230V AC, 0.25 kW 2800 rpm  
DUTY CYCLE: Maximum 30% at max. load

### LIFTING WIRE SPECIFICATIONS:


LIFTING WIRE: 2 mm (5/64 in) 7×7 PP coated galv. steel wire (EN 12385-4)  
MINIMUM BREAKING LOAD (WIRE): 280 kg (2.75 kN / 618 lb)  
WIRE SAFETY FACTOR: minimum 10  
WIRE FLEET: 76 mm (3.0 in)  
WIRE FLEET ANGLE: None  
MAXIMUM EXPECTED WIRE LIFETIME:

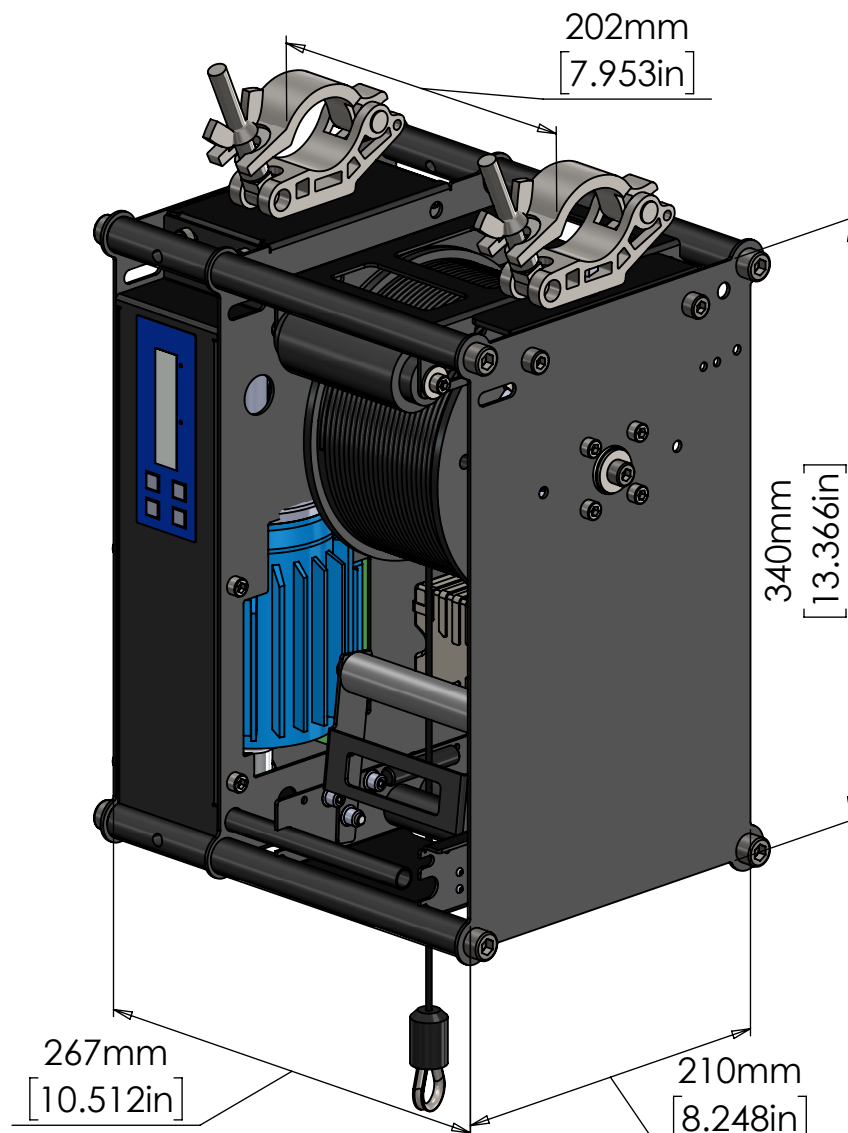


# Winch 25

Item no .220


FRONT VIEW  
TOP POSITION

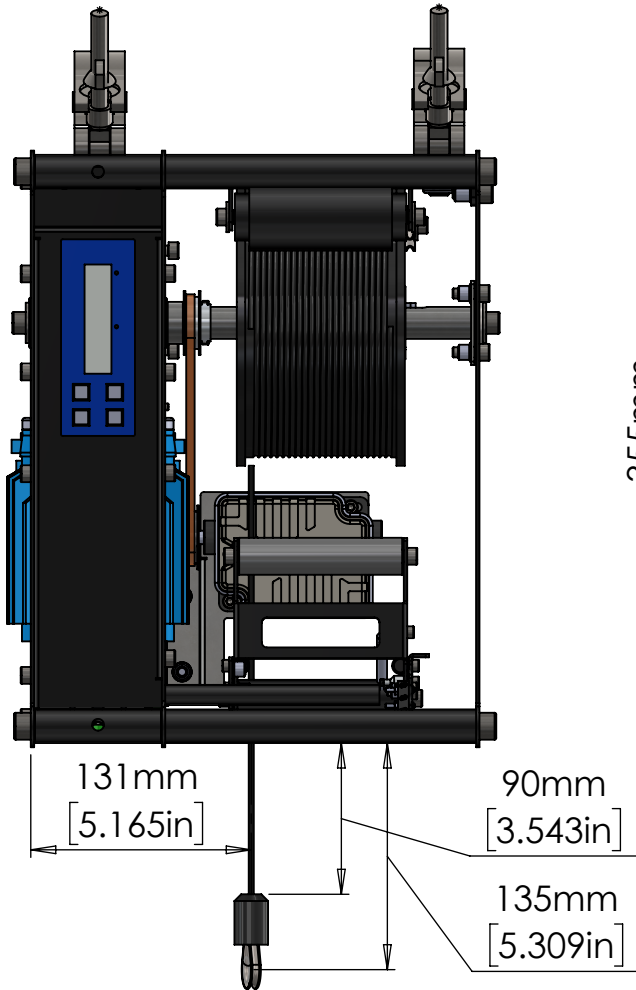

FRONT VIEW  
BOTTOM POSITION

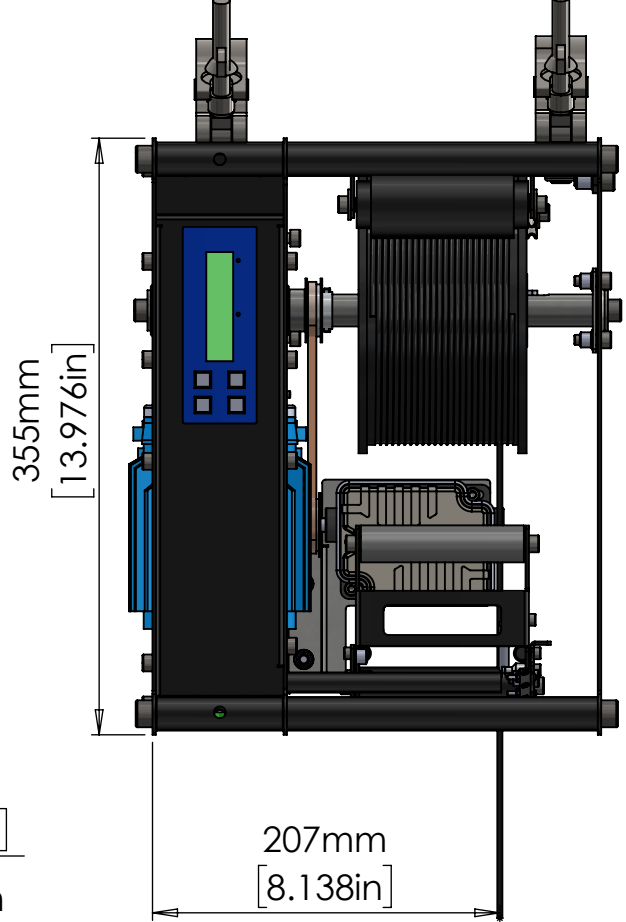

TOP VIEW

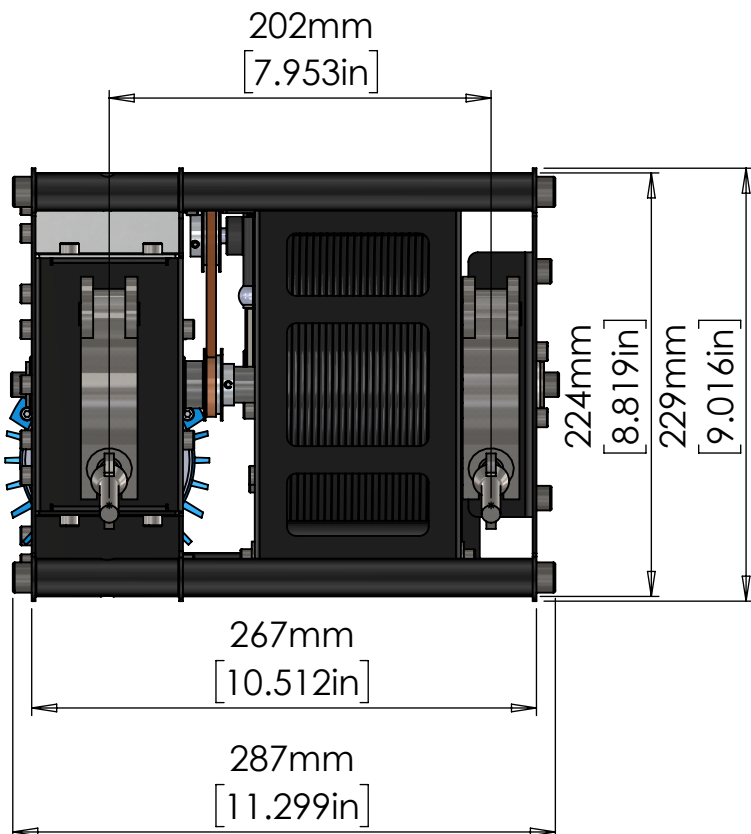

SIDE VIEW

