


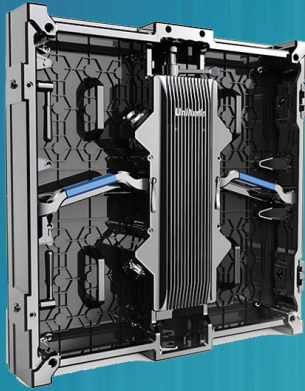

## UpadIII 2.6

### INDOOR SOLUTION

- High Precision Curve.
- Easy Maintenance.
- Optional 90° Angle.

### Get Creative with Flexibility

---


High precision curving blocks support customized wall curves, 0-10° concave and 0-5° convex.



### One Person Maintenance

---

Rear accessible magnetic design allows module replacement from the back. UpadIII's power supply, receiving, card, and HUB card are easily replaced from the back.

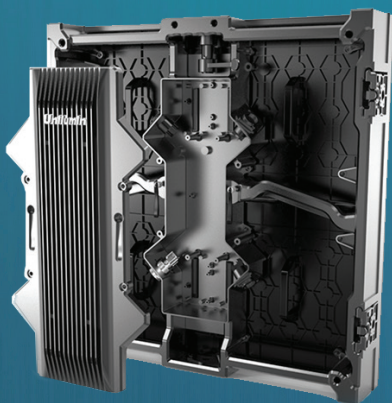


### Contact Us

844.263.3675 | [www.unilumin-usa.com](http://www.unilumin-usa.com)

Find Us @UniluminUSA



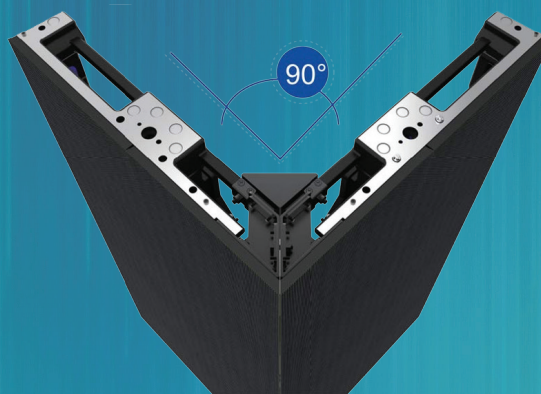

## Perfect Right Angle

Modules are magnetically captive to the frame allowing for a perfect 90° angle.

| Parameter                           | Value                                                 |
|-------------------------------------|-------------------------------------------------------|
| Pixel Pitch                         | 2.604mm                                               |
| LED Type                            | 3-in-1 Black SMD                                      |
| Brightness                          | 1,000 cd/m <sup>2</sup> (nits) calibrated             |
| Pixels Per Panel                    | 192 x 192 pixels                                      |
| Pixel Density                       | 147,456 pixels/m <sup>2</sup>                         |
| Weight Per Panel                    | 9 kg (19.8 lbs)                                       |
| Module Size                         | W250mm x 250mm / (9.8in x 9.8in)                      |
| Cabinet Size                        | W500mm x H500mm x D91.6mm / (19.7in x 19.7in x 3.6in) |
| Aspect Ratio                        | 1:1                                                   |
| Material                            | Die-casting Aluminum                                  |
| Ingress Protection                  | IP30                                                  |
| Operating Temperature/Humidity      | -10°~ +45° / 10~80%RH                                 |
| Storage Temperature/Humidity        | -20°~ +50° / 10~80%RH                                 |
| Maintenance                         | Rear                                                  |
| Curve                               | (Convex)-5°~+10°(Concave)                             |
| Horizontal / Vertical Viewing Angle | 140° / 120°                                           |
| Color Temperature                   | 2000-9300K Adjustable                                 |
| Brightness Control                  | Manual/Automatic                                      |
| Contrast Ratio                      | 3000:1                                                |
| Input Power (Max/Typical)           | 120W/40W per panel                                    |
| Video Frame Rate                    | 50/60 Hz                                              |
| Refresh Rate                        | 3840 Hz                                               |
| Input Voltage                       | 100~240VAC                                            |
| Input Power Frequency               | 50~60 Hz                                              |
| Input Signal                        | DVI/HDMI/VGA/SDI/DP/AV/S-Video                        |
| Mounting Configurations             | Hanging, Stacking                                     |
| Certification                       | TUV-CE/UL/CB/FC C/IC/RoHs                             |

Specifications are for reference only and are subject to change without notice.