



traulux t-rent

LED CABINET T-RENT 2,6 LITE


THE BEST VALUE FOR YOUR PROJECTS

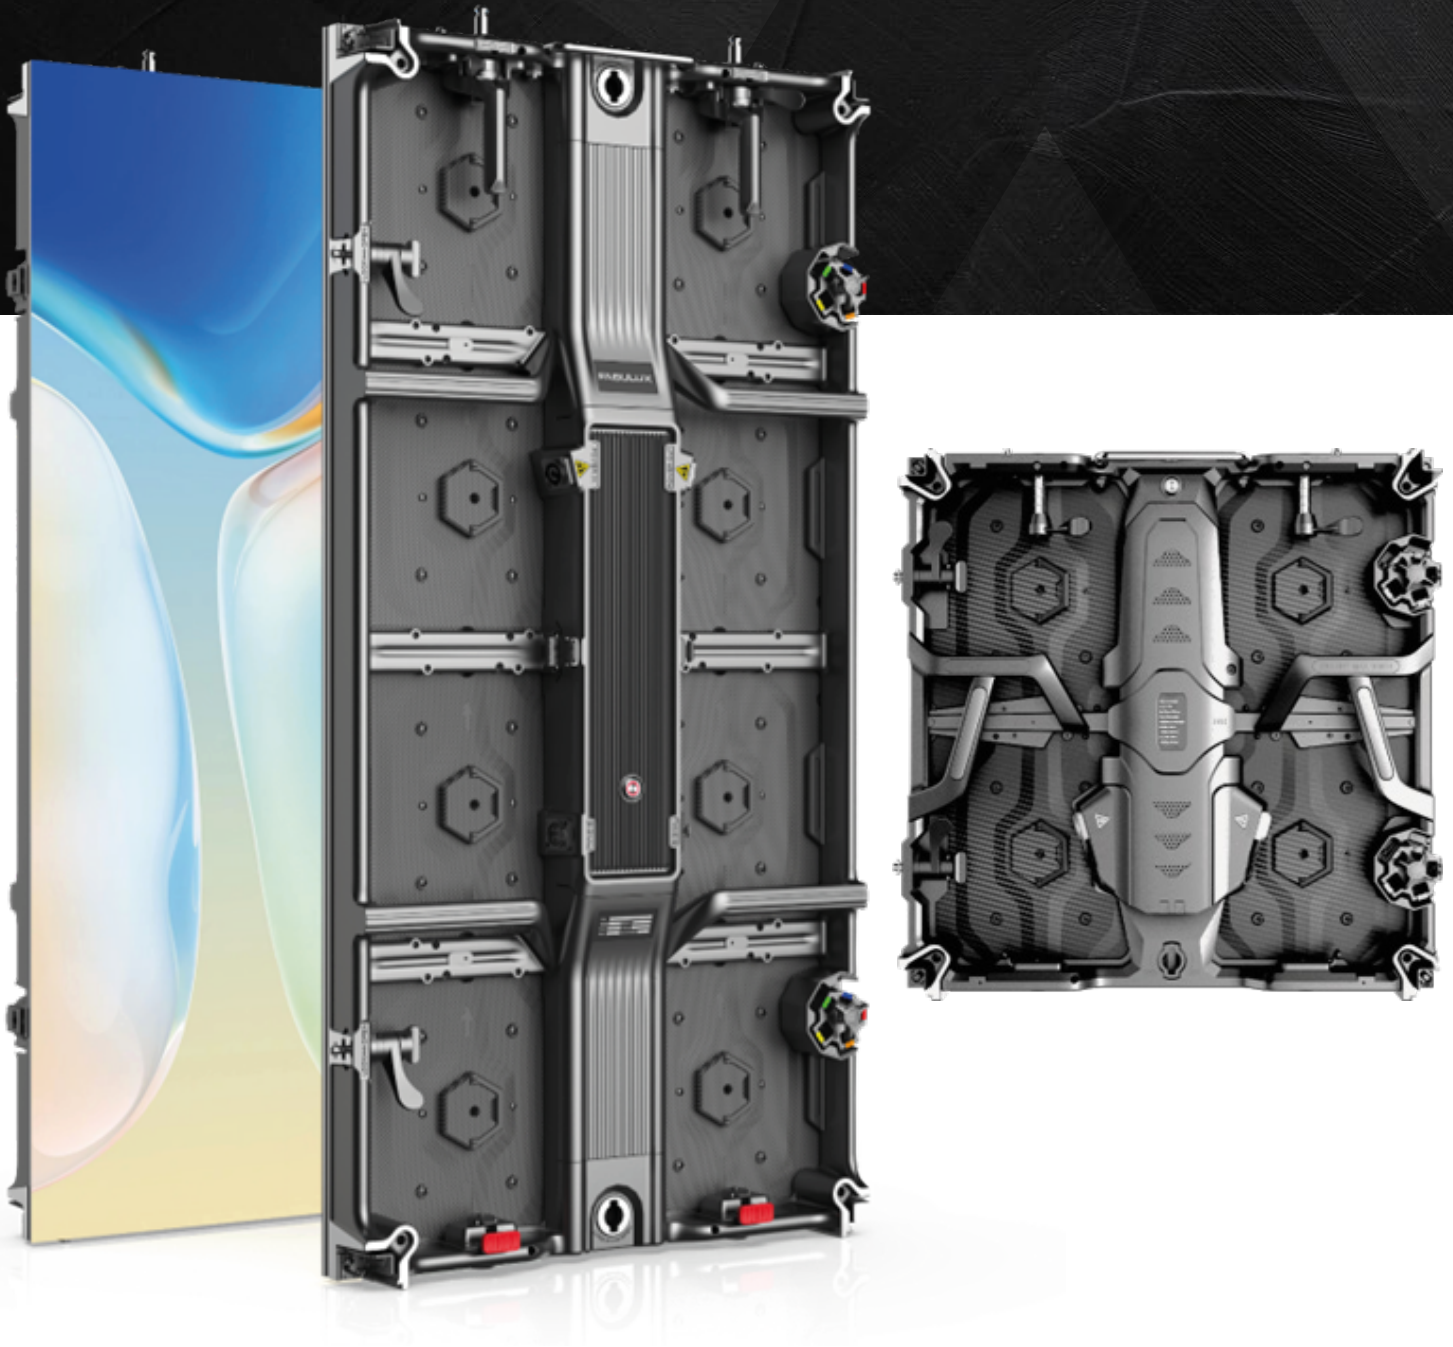


CALIBRATE COEFFICIENTS FOR BEST PERFORMANCE

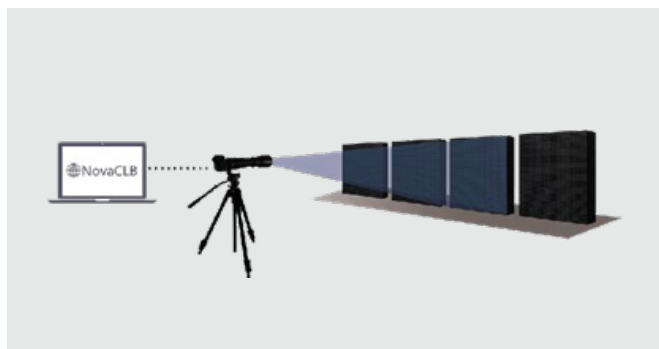

LOCK CURVE SYSTEM $+6^{\circ} +3^{\circ} / -6^{\circ} -3^{\circ}$

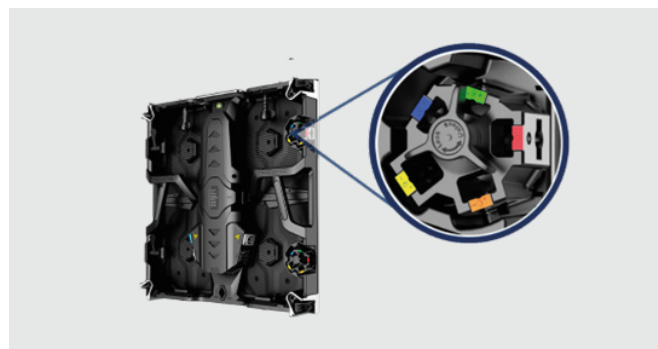

CORNER PROTECTION

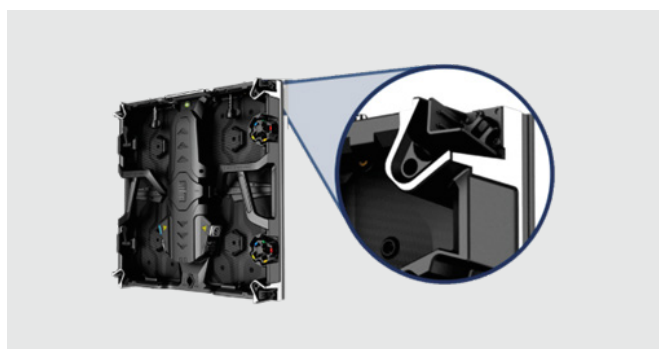

HANGING AND STACKING HARDWARE



50x100 or 50x50 cabinet

Universal hub allows switch between modules pitch 2.6 to 1.9

Cabinets calibrated with color coefficients

Natural colors

A8s-n

Refresh ratio for tv 3840 hz

Corner cabinet option

Certified hardware for hanging and stacking

Curve screen option

Charmex official technical service

Flight cases for cabinets and hardware

Weight per square meter less than 30kg



T-RENT 2.6 LITE SPECIFICATIONS

Pixel Pitch	2,6	
Scan	1/32	
Led	COOPER SMD 2020	
Ic driver	SUM435	
HUB	Universal	
Refresh Rate	3840 Hz	
Receiving card	A8s-N	
Contrast	10.000:1	
Brightness	800 -1200 nits	
Size	500x500x75	1000x500x75
Resolution	192 px x 192 px	384 px x 192 px
Angulo visión H	160 °	
Angulo visión V	160 °	
Power Consum Max	400 w x m ²	
Power Consum Average	160 w x m ²	
Gray scale	16 bits	
Ip Ratio	Indoor	
Color Space	sRGB	
HDR	Si	
Weight	8 kg	
Hardware	Hanging y stacking	
Certifications	EMC Clase A-ROHS – CE – ETL	